Model No.:	CWD-905

- ***Supports data throughput rate up to 300mbps***
- ***Advanced QoS for better user experience for audio, video & voice application (WMM)***
- ***One touch encryption enables easy security setup (WPS)***

Wireless-N USB Dongle

The CNet Wirelesst-N (draft 802.11n) USB Dongle installs in most Notebooks or Desktops and lets you put your computer almost anywhere in the building, without the cost and hassle of running network cables.

The CNet Wireless-N (draft 802.11n) USB Dongle connects you with 11n networks at an incredible 300Mbps! And for added versatility, CNet CWD-905 is also capable of inter-operating with all the Wireless-G and B products found in homes, businesses, and public wireless hotspots around the country.

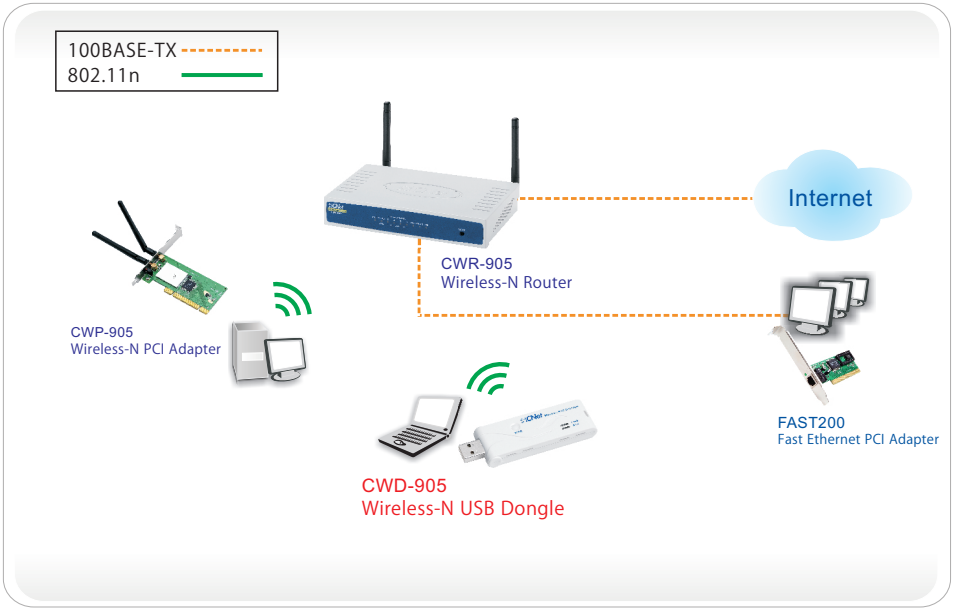

Model No.: **CWD-905**

Wireless-N USB Dongle

Features

- Complies with IEEE 802.11n Draft 2.0 and IEEE802.11g/b standards
- Supports downstream data rate up to 300Mbps and upstream data rate up to 150Mbps.
- interoperates with existing Wireless-G/B equipments
- Advanced WPA (Wi-Fi Protected Access) encryption, 64/128-bit WEP and AES/TKIP provide maximum wireless security
- Advanced Quality of Service (QoS) WMM function improves the user experience for audio, video and voice application.
- Supports operating system: Windows 2000/XP/XP 64/Vista/Vista 64

Specifications

Model	CWD-905
Standards	· IEEE 802.11g · IEEE 802.11b · IEEE 802.11n Draft 2.0
Channels	· 1-11 (U.S.) · 1-13 (Elsewhere Worldwide) · 1-13,14 (Japan)
Interface	· USB 2.0 (USB 1.1 Compatible)
Driver Support	· Windows 2000 / XP 32 / XP 64 / Vista 32 / Vista 64 · Linux · MAC OS
Driver Support	· Windows 2000 / XP 32 / XP 64 / Vista 32 / Vista 64 · Multi-Language: English, German, French, Italian, Spanish, Traditional Chinese,Simplified Chinese, Japanese, Arabic and Portuguese.,
LED Indicators	· Link : Yellow · ACT : Yellow
Frequency Band	· 2.312GHz ~ 2.484GHz
Modulation	· 802.11b: CCK, DQPSK, DBPSK · 802.11 g and 11n : OFDM
Antenna	· Internal two printed antenna (One TX / Two RX)
Securities	· WEP 64/128, WPA(TKIP),WPA2(AES)
Power Voltage	· 5V DC
WPS Button	· Supports WPS function for PBC protocol
Environment	· Operating Temperature: 0°~40°C (32°~104°F) · Storage Temperature: -20°~70°C (-4°~158°F) · Humidity: 10%~90% Non-condensing
Certifications	· CE, FCC
Dimensions (L x W x H)	· 90x26x10.3mm (3.54 x 1.02 x 0.40 inches)

Ordering Information

Model	Description
CWD-905	Wireless-N USB Dongle